ALTERATION TABLE			
ALT.	DESCRIPTION	AUTH.	DATE
B	CORRECTED	[illegible]	7/14/45

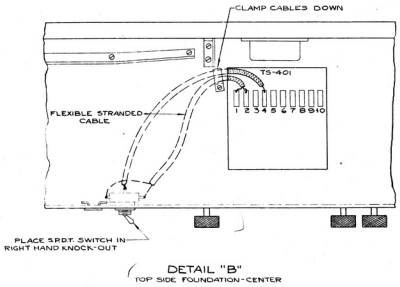

DETAIL "B"
TOP SIDE FOUNDATION-CENTER

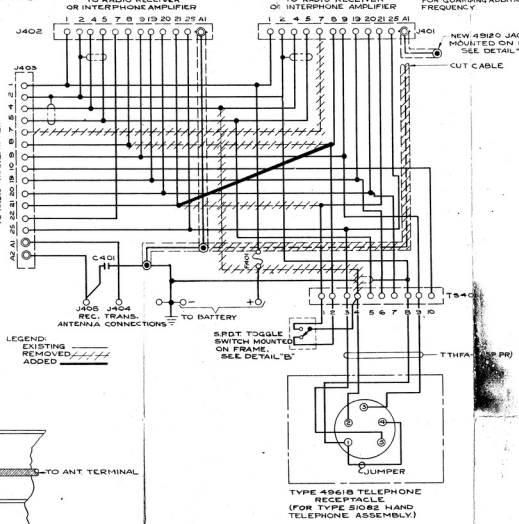

STEPS NECESSARY TO MODIFY SCR 508/608 FOR RECEIVER AUDIO SELECTION

1. REMOVE LEAD (WHITE WITH RED-BROWN TRACER) BETWEEN J401 PIN 7 AND J403 PIN 7.
2. REMOVE LEAD (WHITE WITH RED-GREEN TRACER BETWEEN J402 PIN 21 AND J401 PIN 21. RETAIN LEAD (WHITE WITH RED-GREEN TRACER) BETWEEN J401 PIN 21 AND TS401 TERMINAL 1.
3. CUT LEAD (WHITE WITH BROWN TRACER) BETWEEN J402 PIN 8 AND TS401 TERMINAL 2. SPLICE THIS LEAD TO THE LEAD REMAINING ON J402 PIN 21 (WHITE WITH RED-GREEN TRACER) SO THERE IS CONTINUITY BETWEEN J402 PIN 21 AND TS401 TERMINAL 2.
4. MOUNT S.P.D.T. TOGGLE SWITCH IN RIGHT HAND CABLE KNOCK-OUT ON FRONT OF MOUNTING FT-237.
5. CONNECT TS401 TERMINAL 1 TO ONE SIDE OF SWITCH AND TS401 TERMINAL 2 TO OTHER SIDE OF SWITCH. CLIP AND TAPE LEAD ON TS401 TERMINAL 4 AND RUN LEAD BETWEEN THIS TERMINAL AND POLE OF TOGGLE SWITCH.

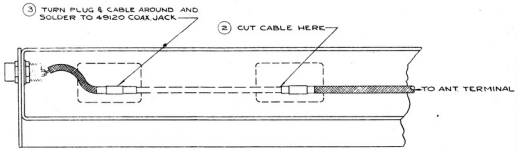

DETAIL "A"
LEFT SIDE BACK OF FOUNDATION

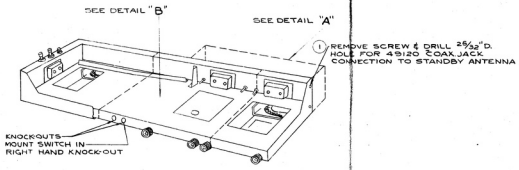

FOUNDATION SCR-508

3	
2	
1	

RECOMMENDED

DRAFTSMAN	[illegible]
TRACER	[illegible]
CHECKED	B. Clark
ENGINEER	R. J. Wells
DESIGN ENGINEER	[illegible]

ELECTRONICS DIVISION

MODIFICATION FOR SCR 508 AND 608 RADIO EQUIPMENT

SCALE N/A DATE MAY 5, 1945

RE 43F 513B